

Continuous Hinges – WT Series (Wide Throw)


The backbone of the door opening is the hinging system. Syntégra continuous hinges come preinstalled on the door, and are precision-engineered to withstand the severities of the toughest environments while retaining their beauty throughout the life of the building. Syntégra hinges evenly distribute the forces along the full length of the door which reduces stress on the frame, closer, and the locking system.

Wide throw hinge leaves are extended (variable) to move the pivot point away from the door. This provides additional clearance between the door face and the frame face when the door is opened to 180 degrees.



Features

- Heavy-Duty 14 Gauge 304 Stainless Steel
- No exposed Fasteners when door is closed
- 'Clean' bearings standard
- Self-drilling screws supplied
- Welded End Pins standard
- Supports door weights up to 600 lbs.
- US32D Satin Finish

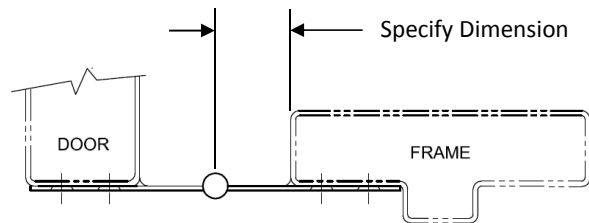

Options

- Security Fasteners (Torx-Pin)

Certifications

- Exceeds ANSI/BHMA A156.26 Grade 1 requirements
- Meets UL10C – U.L. and U.L.C. listed
- Meets ANSI/BHMA A117.1 and ADA for barrier-free access